

HCA120S20D1A

SiC Automotive Silicon Carbide Schottky Diode

1200V, 20A

Description

The 1200V SiC is an advanced Power Master Semiconductor's silicon carbide diode family. This technology combines the benefits of excellent low forward voltage and robustness. Consequently, the SiC family is suitable for application requiring high power efficiency


Applications

- OBC (On Board Charger)
- DC/DC Converter for EV/HEV
- Wireless Charger

Features

V_{RRM}	I_F	$T_{J,max}$	Q_C
1200 V	20 A	175 °C	121 nC

- No reverse recovery current
- Low forward voltage
- 175°C Max junction temperature
- High surge current capability
- Switching behavior independent of temperature
- AEC Q101 Qualified
- Pb-Free, Halogen Free and RoHS compliant

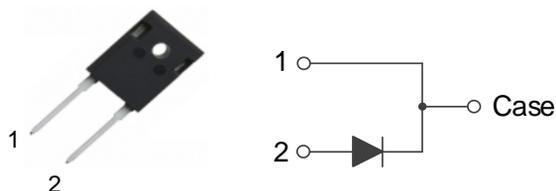

Absolute Maximum Ratings ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit	
V_{RRM}	Repetitive Peak Reverse Voltage	1200	V	
I_F	Forward Current	$T_C = 150^\circ\text{C}$ 20	A	
$I_{F,SM}$	Non-Repetitive Forward Surge Current	$T_C = 25^\circ\text{C}, t_p = 10 \text{ ms}$	135	A
		$T_C = 150^\circ\text{C}, t_p = 10 \text{ ms}$	115	A
$I_{F,Max}$	Non-Repetitive Peak Forward Current	$T_C = 25^\circ\text{C}, t_p = 10 \mu\text{s}$	1180	A
		$T_C = 150^\circ\text{C}, t_p = 10 \mu\text{s}$	980	A
I^2dt value	$\int I^2 dt$	$T_C = 25^\circ\text{C}, t_p = 10 \text{ ms}$	91	A^2s
		$T_C = 150^\circ\text{C}, t_p = 10 \text{ ms}$	66	A^2s
P_{tot}	Power Dissipation	$T_C = 25^\circ\text{C}$ 273	W	
T_J, T_{STG}	Operating Junction and Storage Temperature	-55 to +175	$^\circ\text{C}$	

Thermal Characteristics

Symbol	Parameter	Value	Unit
$R_{\theta JC}$	Thermal Resistance, Junction to Case, Max.	0.55	$^\circ\text{C/W}$

Package Marking and Ordering Information

Part Number	Top Marking	Package	Packing Method	Quantity
HCA120S20D1A	HCA120S20D1A	TO-247-2L	Tube	30 units

Electrical Characteristics ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
V_F	Forward Voltage	$I_F = 20\text{ A}, T_C = 25^\circ\text{C}$		1.39	1.70	V
		$I_F = 20\text{ A}, T_C = 175^\circ\text{C}$		1.8	-	
I_R	Reverse Current	$V_R = 1200\text{ V}, T_C = 25^\circ\text{C}$		-	100	μA
		$V_R = 1200\text{ V}, T_C = 175^\circ\text{C}$		-	300	
Q_C	Total Capacitive Charge	$V_R = 800\text{ V}, T_C = 25^\circ\text{C}$		121		nC
C	Total Capacitance	$V_R = 1\text{ V}, f = 100\text{ kHz}$		1357		pF
		$V_R = 800\text{ V}, f = 100\text{ kHz}$		85		
E_C	Capacitance Stored Energy	$V_R = 800\text{ V}, T_C = 25^\circ\text{C}$		34		μJ

Typical Performance Characteristics

Figure 1. Power Derating

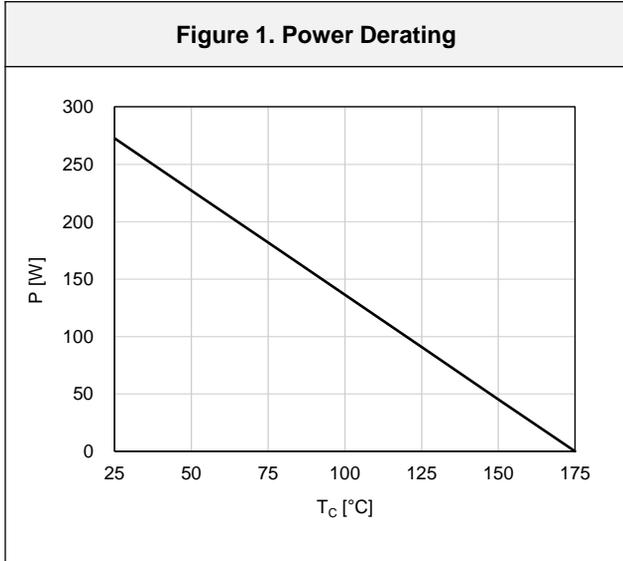


Figure 2. Current Derating

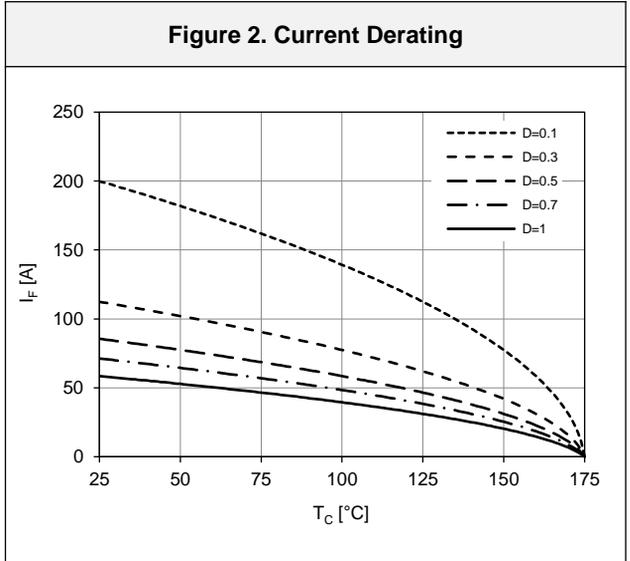


Figure 3. Forward Characteristics

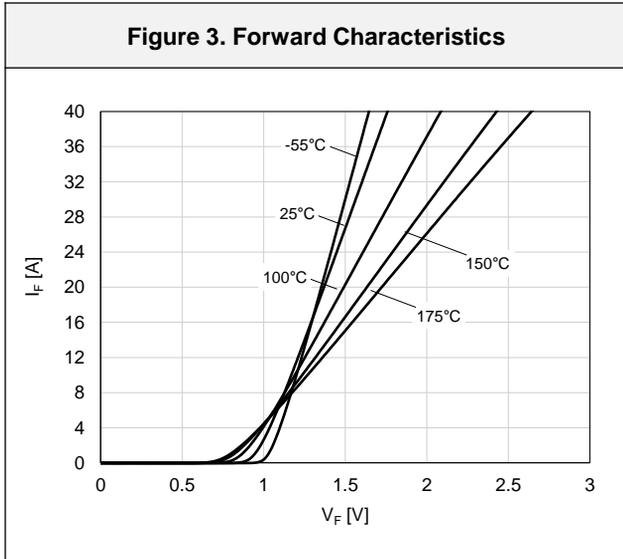


Figure 4. Reverse Characteristics

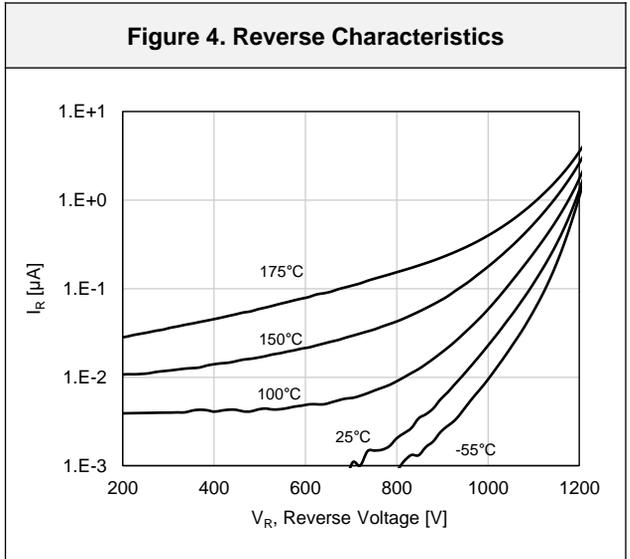


Figure 5. Capacitive Charge Characteristics


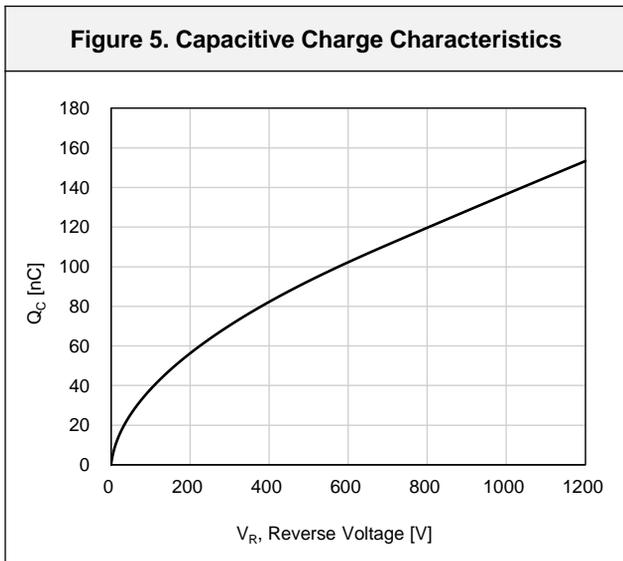


Figure 6. Capacitance Stored Energy

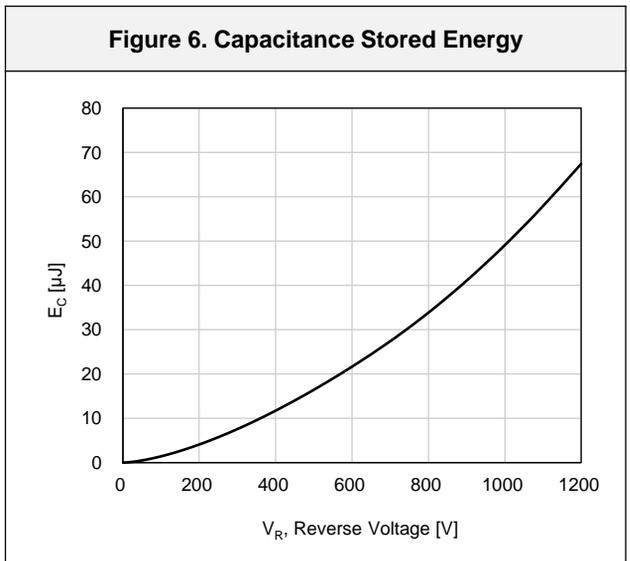

Typical Performance Characteristics

Figure 7. Capacitance Characteristics



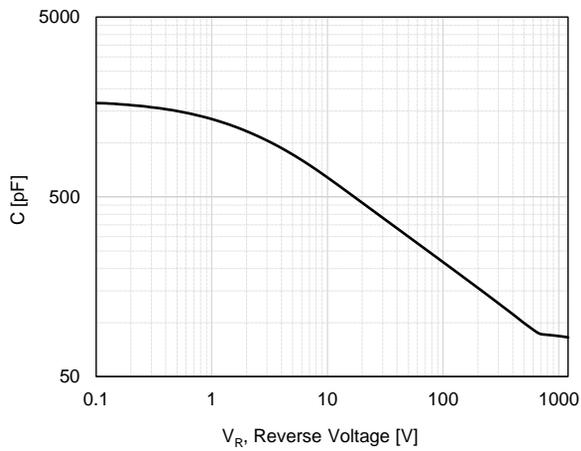


Figure 8. Transient Thermal Response Curve

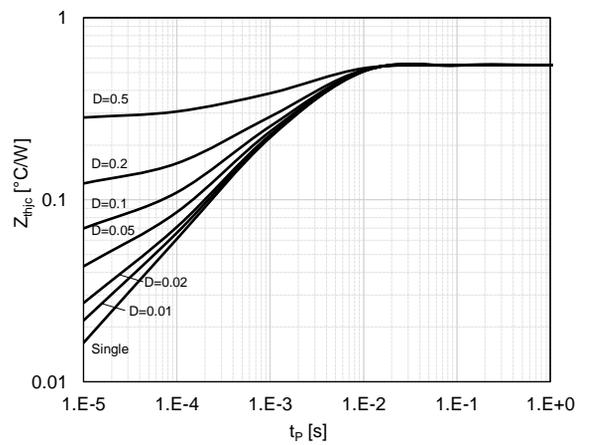

Package Outlines
TO-247-2L

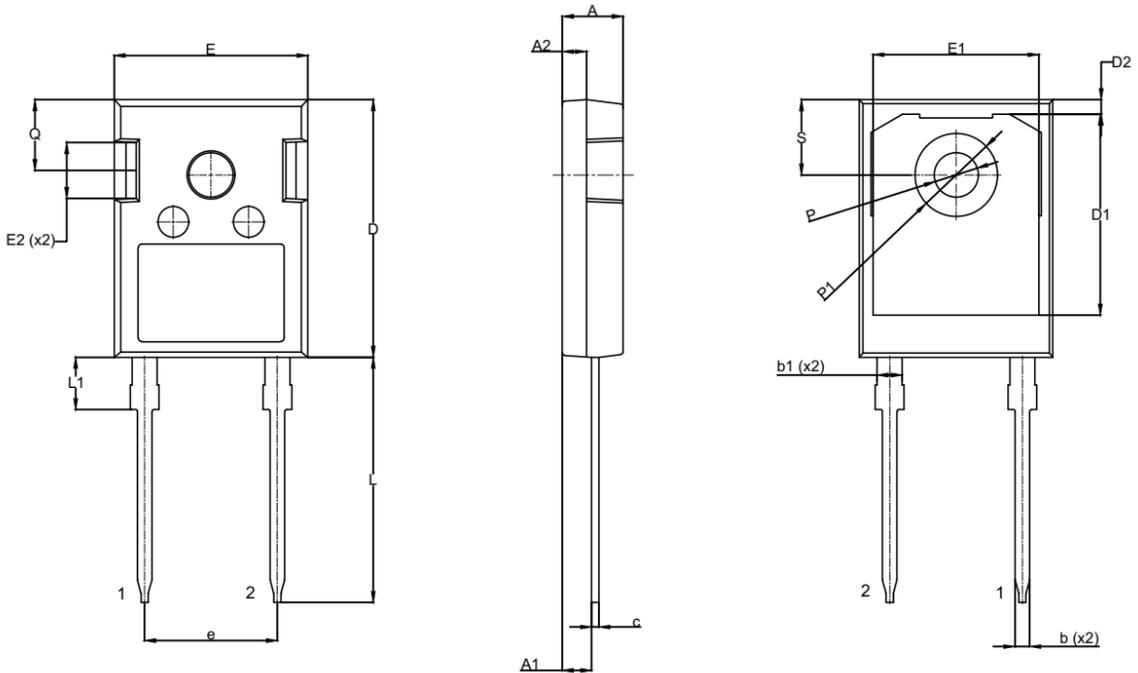

SYMBOL	Common		
	DIMENSIONS MILLIMETER		
	MIN.	NOM.	MAX.
A	4.80	5.00	5.20
A1	2.29	2.42	2.54
A2	1.90	2.00	2.10
b	1.10	1.20	1.30
b1	1.91	2.06	2.20
c	0.50	0.60	0.70
D	20.80	21.07	21.34
D1	16.26	16.46	16.66
D2	0.97	1.17	1.37
E	15.75	15.94	16.13
E1	13.46	13.66	13.86
E2	4.32	4.58	4.83
e	10.92 BSC.		
L	19.85	20.05	20.25
L1	4.05	4.27	4.48
P	3.56	3.61	3.66
P1	6.75	6.80	6.85
Q	5.38	5.79	6.20
S	6.15 BSC.		